

SPECIFICATIONS BBS220-SS/MIR-UGG

Slimline Back Bar Heavy Duty 2-Door Chiller





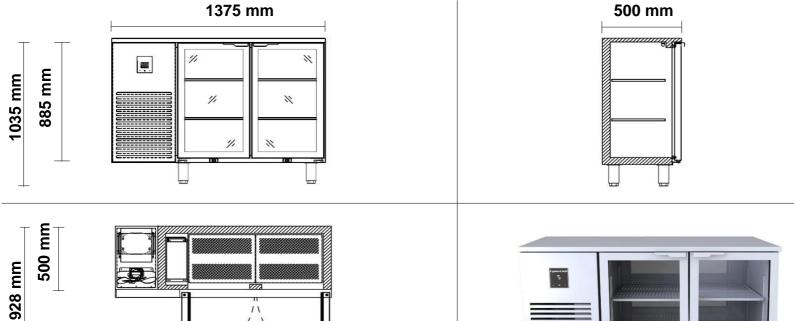



Specifications			
Refrigeration system	Self-contained, side mounted, electronically controlled, refrigeration unit		
Refrigerant	R290	Gas Charge	80 g
Electrical	220-240 Volts a.c. 50 Hz	Amps	1.2 Amps
Nominal capacity	373 Watts @ -10°C SST		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Insulation	50mm thick, high density Zero ODP injected polyurethane insulation		
Cabinet body	304 Stainless Steel Exterior & Mirror Interior, Galvanised Steel Back & Base		
Cabinet temperature range	+3°C to +15°C up to 43°C ambient		
kWh/24hr	n/a	Star Rating	tbc
Cabinet internal volume	273 litres	Net usable GN volume	tbc
Weight	150 kg	dBA	55
Worktop	Integrated 27mm stainless steel worktop		
Door / Drawer	2 x SS Self-Closing Lockable Doors		
Doors / Drawer Configuration	2 xTriple Glazed LowE Argon filled Glass Doors		
Shelves	2 x SS Perforated shelves & adjustable tray slides per door Total = 4		Total = 4
Options	Solid / Frameless Glass Doors, Black Exterior, Retro FInish, Half Drawers, etc.		
Cabinet dimensions	External	Internal	
Width	1375 mm	825 mm	
Depth	500 mm	400 mm	
Height	885 mm (excl. legs, castors & worktop)	600 mm	

www.cyberchill.com.au I info@cyberchill.com.au I 1300 072 000