


# SPECIFICATIONS

## CC300B-USL

### Slimline Upright Glass Door Merchandiser

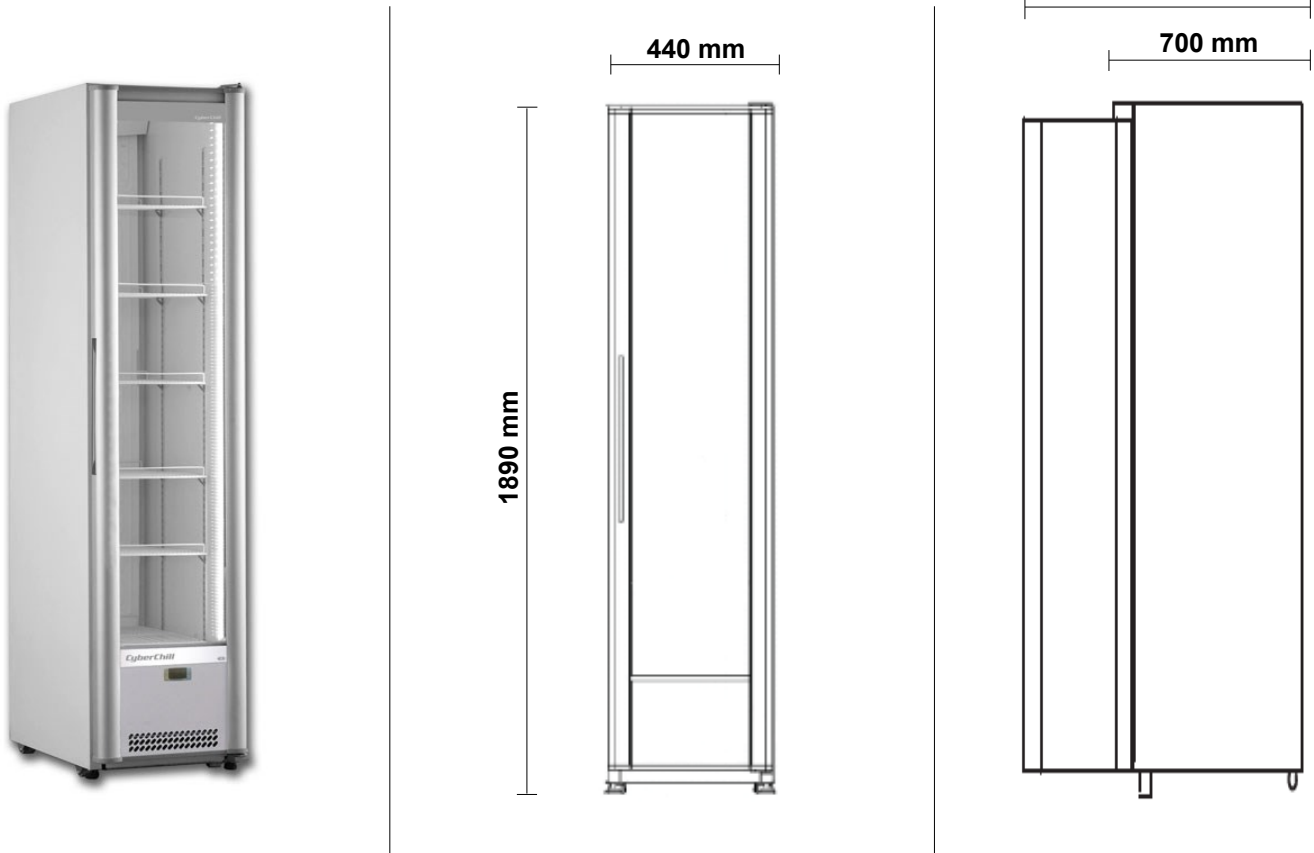

#### SPECIFICATIONS

<b>Refrigeration system</b>	Electronic controlled, self-contained, bottom-mounted, split refrigeration unit	
<b>Refrigerant</b>	R600a / 74g	
<b>Cabinet Classes</b>	3M1	
<b>Energy consumption</b>	4.36 kWh/24h	
<b>Cabinet internal volume</b>	220 litres	
<b>Insulation</b>	35mm thick, high density Zero ODP injected PUR insulation	
<b>Cabinet temperature range</b>	+1°C to +4°C up to 35°C ambient	
<b>Drainage</b>	Waste heat vaporiser located in service compartment (no plumbing required)	
<b>Electrical</b>	240 Volts a.c. 50 Hz, 1.5 Amps	
<b>Doors</b>	1 x Self-closing, LowE, double glazed (safety glass) swing door	
<b>Lighting</b>	Internal LED light (automatic & with manual switch)	
<b>Shelves</b>	5 x PVC coated wire shelves (+1 bottom PVC shelf)	
<b>Weight</b>	75kg	
<b>Cabinet dimensions</b>	<b>External</b>	<b>Internal</b>
<b>Width</b>	440mm	370mm
<b>Depth</b>	700mm	595mm
<b>Height</b>	1890mm	1440mm

#### KEY FEATURES

- Energy saving controller with alarms
- Automatic off cycle defrost
- Adjustable shelving
- Removeable magnetic door gasket
- Adjustable levelling feet - front
- Roller - rear