


SPECIFICATIONS

GFS600-800-D



Back Bar Freezer

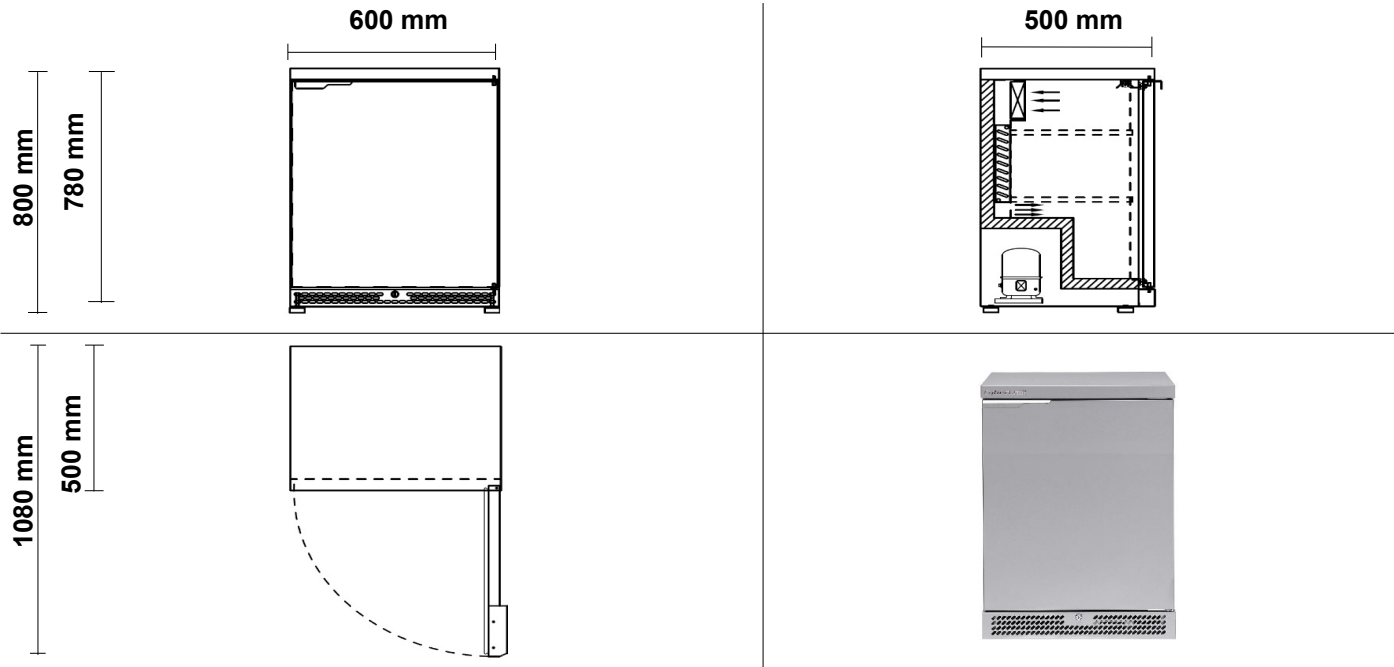

Specifications

Refrigeration system	Self-contained, electronically controlled, refrigeration unit		
Refrigerant	R290	Gas Charge	80 g
Electrical	220-240 Volts a.c. 50 Hz	Amps	1.6 Amps
Nominal capacity	208 Watts @ -30°C SST		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Insulation	35mm thick, high density Zero ODP injected polyurethane insulation		
Cabinet body	304 Stainless Steel Interior & Exterior, Galvanised Steel Back & Base		
Cabinet temperature range	-18°C to -22°C up to 43°C ambient		
kWh/24hr	tbc	Star Rating	tbc
Capacity (300ml bottles)	tbc	Net usable GN volume	tbc
Weight	55 kg	dBA	tbc
Worktop	Integrated stainless steel worktop		
Internal Door / Drawer GN Capacity	1 x Door: 493mm wide x 292mm deep		
Doors / Drawer Configuration	1 x SS Lockable, Self-closing solid door(s)		
Shelves	2 x SS Perforated adjustable shelves per door		Total = 2
Options	Glass door, Remote, Painted Exterior		
Cabinet dimensions	External		Internal
Width	600 mm		530 mm
Depth	500 mm		370 mm
Height	800 mm (excl. legs, castors & worktop)		626 mm

Note: Rear mounted compressor. Please ensure cabinet is removable for maintenance.