



# SPECIFICATIONS

## HSS340-PREP-DD



### 2-door Space Saving Solutions Prep Chiller

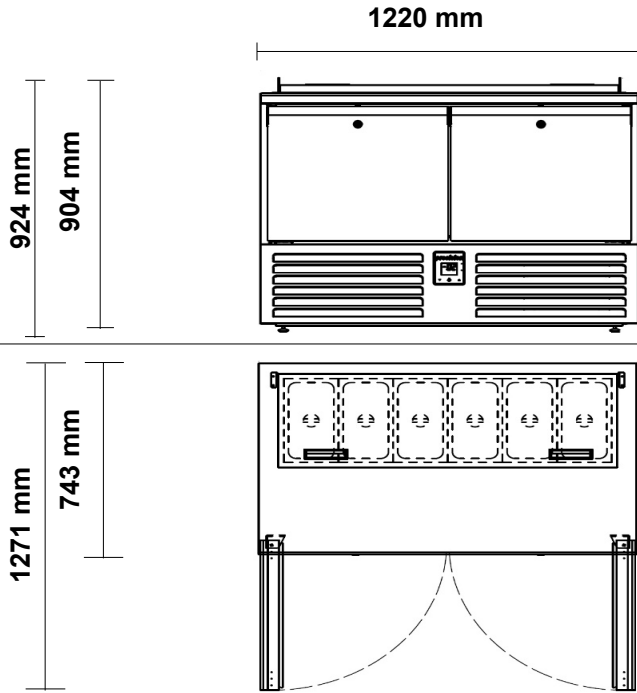

### Specifications

Refrigeration system	Self-contained, bottom mounted, electronically controlled, refrigeration unit		
Refrigerant	R290	Gas Charge	120 g
Electrical	220-240 Volts a.c. 50 Hz	Amps	tbc
Nominal capacity	373 Watts @ -10°C SST		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Insulation	60mm thick, high density Zero ODP injected polyurethane insulation		
Cabinet body	304 Stainless Steel Interior & Exterior, Galvanised Steel Back & Base		
Cabinet temperature range	-2°C to +4°C up to 43°C ambient		
kWh/24hr	tbc	Star Rating	tbc
Cabinet internal volume	340 litres	Net usable GN volume	tbc
Weight	100 kg	dBA	52
Worktop	Integrated 40mm stainless steel worktop ; Airblown well to suit 6 GN1/3 pans (pans not included)		
Internal Door / Drawer GN Capacity	2 x Door: Accepts full GN1/1 pans (325mm wide x 530mm deep)		
Doors / Drawer Configuration	2 x SS Lockable, Self-closing solid door(s)		
Shelves	2 x PVC-coated wire shelves & adjustable tray slides per door	Total = 4	
Options	Half Drawers		
Cabinet dimensions	External		Internal
Width	1220 mm		tbc
Depth	743 mm		tbc
Height	904 mm (excl. legs, castors & worktop)		tbc