




SPECIFICATIONS

HUC150-D

CyberChill

precision
refrigeration

1-door Space Saving Solutions Chiller

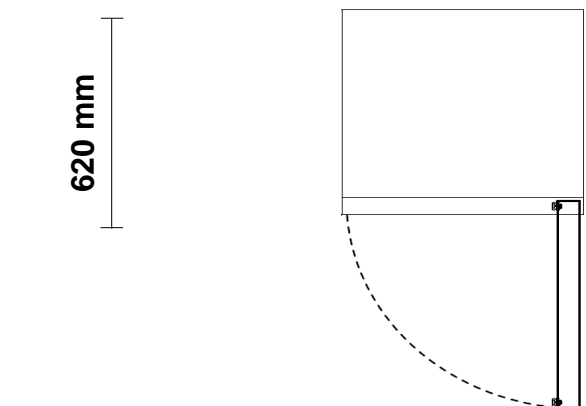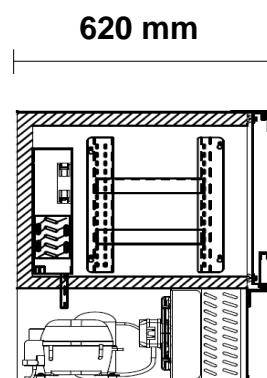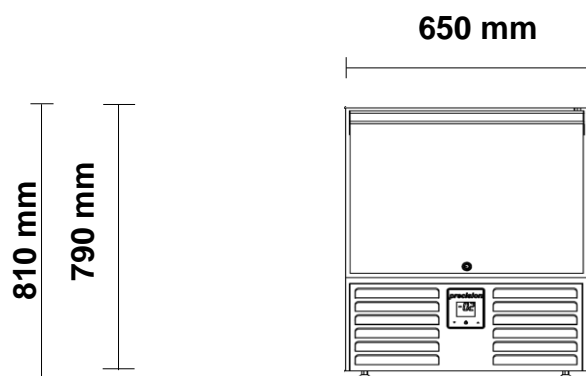

Specifications

Refrigeration system	Self-contained, bottom mounted, electronically controlled, refrigeration unit		
Refrigerant	R290	Gas Charge	100 g
Electrical	220-240 Volts a.c. 50 Hz	Amps	tbc
Nominal capacity	405 Watts @ -10°C SST		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Insulation	60mm thick, high density Zero ODP injected polyurethane insulation		
Cabinet body	304 Stainless Steel Interior & Exterior, Galvanised Steel Back & Base		
Cabinet temperature range	-2°C to +4°C up to 43°C ambient		
kWh/24hr	tbc	Star Rating	tbc
Cabinet internal volume	tbc	Net usable GN volume	48 litres
Weight	65 kg	dBA	52
Worktop	40mm stainless steel worktop		
Internal Door / Drawer GN Capacity	1 x Door: Accepts full GN1/1 pans (325mm wide x 530mm deep)		
Doors / Drawer Configuration	1 x SS Lockable, Self-closing solid door(s)		
Shelves	2 x shelves & adjustable tray slides per door	Total = 2	
Options	Big Barista Drawer, Half Drawers		
Cabinet dimensions	External	Internal	
Width	650 mm	570 mm	
Depth	620 mm	412 mm	
Height	790 mm (excl. legs, castors & worktop)	448 mm	