


SPECIFICATIONS

LPU600-FDR

1-dr Upright Bottom Mount Freezer

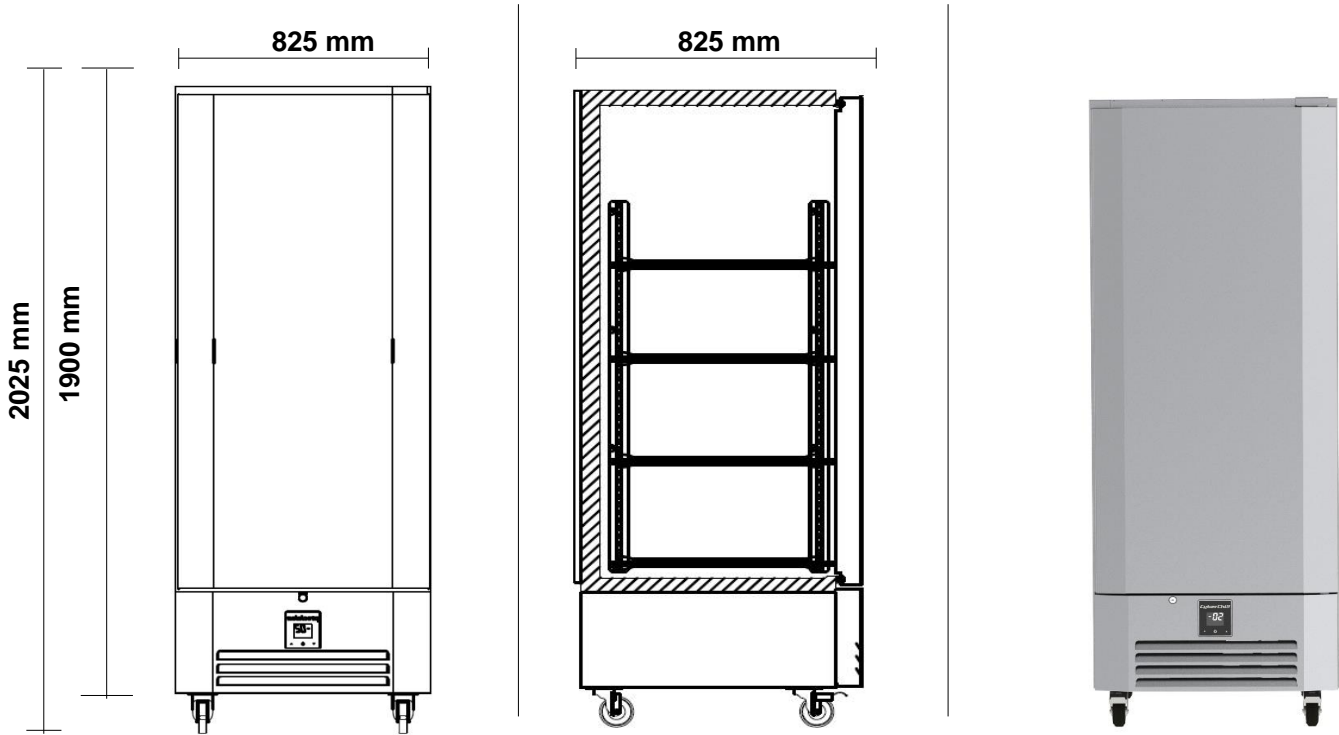

Specifications

Refrigeration system	Self-contained, bottom mounted, electronically controlled, refrigeration unit		
Refrigerant	R290	Gas Charge	125 g
Electrical	220-240 Volts a.c. 50 Hz	Amps	3.8 Amps
Nominal capacity	449 Watts @ -30°C SST		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Insulation	90mm thick, high density Zero ODP injected polyurethane insulation		
Cabinet body	304 Stainless Steel Exterior & Interior, Galvanised Steel Back & Base		
Cabinet temperature range	-18°C to -22°C up to 43°C ambient		
kWh/24hr	tbc	Star Rating	tbc
Cabinet internal volume	600 litres	Net usable GN volume	tbc
Weight	136 kg	dBa	69
Worktop	n/a		
Door Opening	2 x SS Self-Closing Lockable Doors (Accepts full GN1/1 & GN1/2 pans)		
Door Configuration	2 x Stainless Steel Solid Doors		
Shelves	4 x shelves & adjustable tray slides per door		Total = 8
Options	Glass Door, Half Doors, Castors/Legs		
Cabinet dimensions	External	Internal	
Width	720 mm	600 mm	
Depth	825 mm	675 mm	
Height	1900 mm (excl. legs or castors)		1480 mm