


# SPECIFICATIONS

## MLPT601-HDR



### 1-dr Upright Top Mount Chiller/Freezer

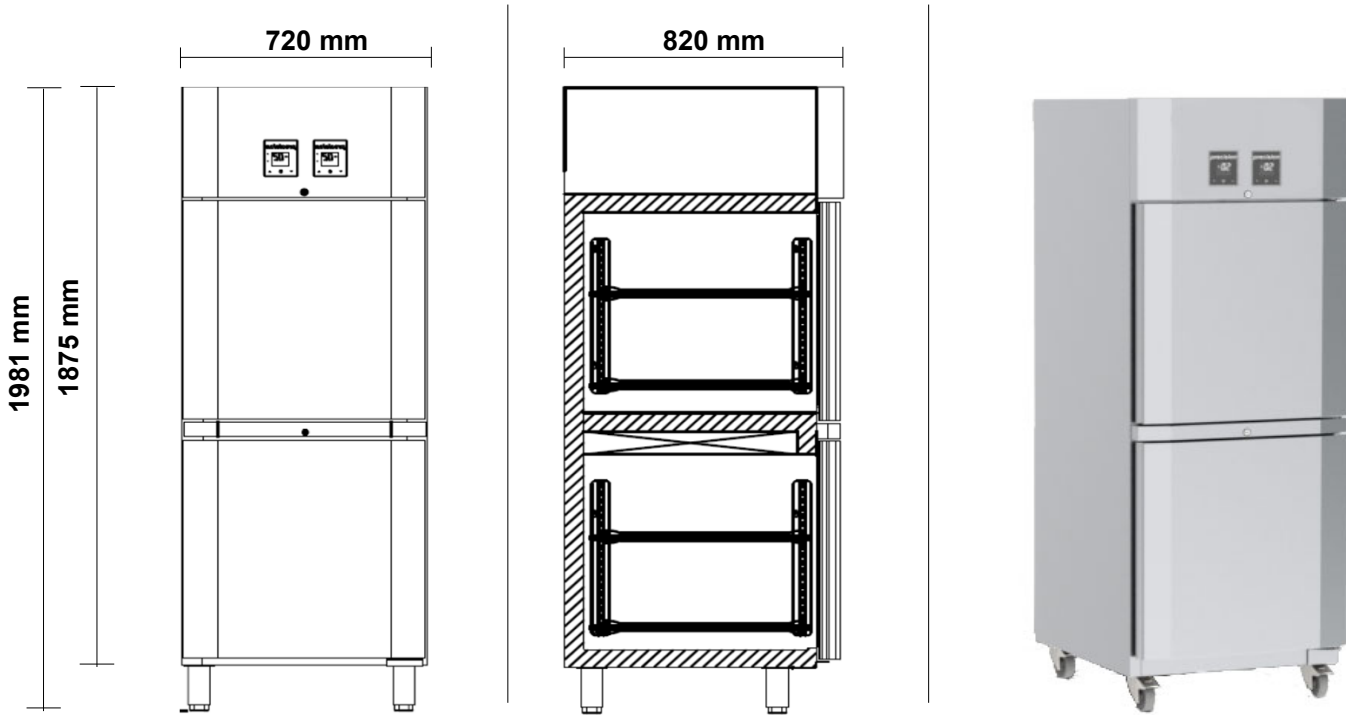

### Specifications

Refrigeration system	Self-contained, top mounted, electronically controlled, refrigeration unit		
Refrigerant	R290	Gas Charge	tbc
Electrical	220-240 Volts a.c. 50 Hz	Amps	tbc
Nominal capacity	tbc Watts @ -10°C SST		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Insulation	90mm thick, high density Zero ODP injected polyurethane insulation		
Cabinet body	304 Stainless Steel Exterior & Interior, Galvanised Steel Back & Base		
Cabinet temperature range	-2°C to +4°C / '-18°C to -22°C up to 43°C ambient		
kWh/24hr	tbc	Star Rating	tbc
Cabinet internal volume	600 litres	Net usable GN volume	tbc
Weight	146 kg	dB(A)	66
Worktop	n/a		
Door Opening	2 x SS Self-Closing Lockable Doors (Accepts full GN1/1 & GN1/2 pans)		
Door Configuration	; 2 x Half Doors		
Shelves	2 x shelves & adjustable tray slides per door	Total = 4	
Options	Glass Door, Remote, Legs/Castors		
Cabinet dimensions	External	Internal	
Width	720 mm	557 mm	
Depth	820 mm	657 mm	
Height	1875 mm (excl. legs or castors)	1459 mm	