


SPECIFICATIONS

PCF130-PT



Roll In Blast Chiller/Freezer Pass Through

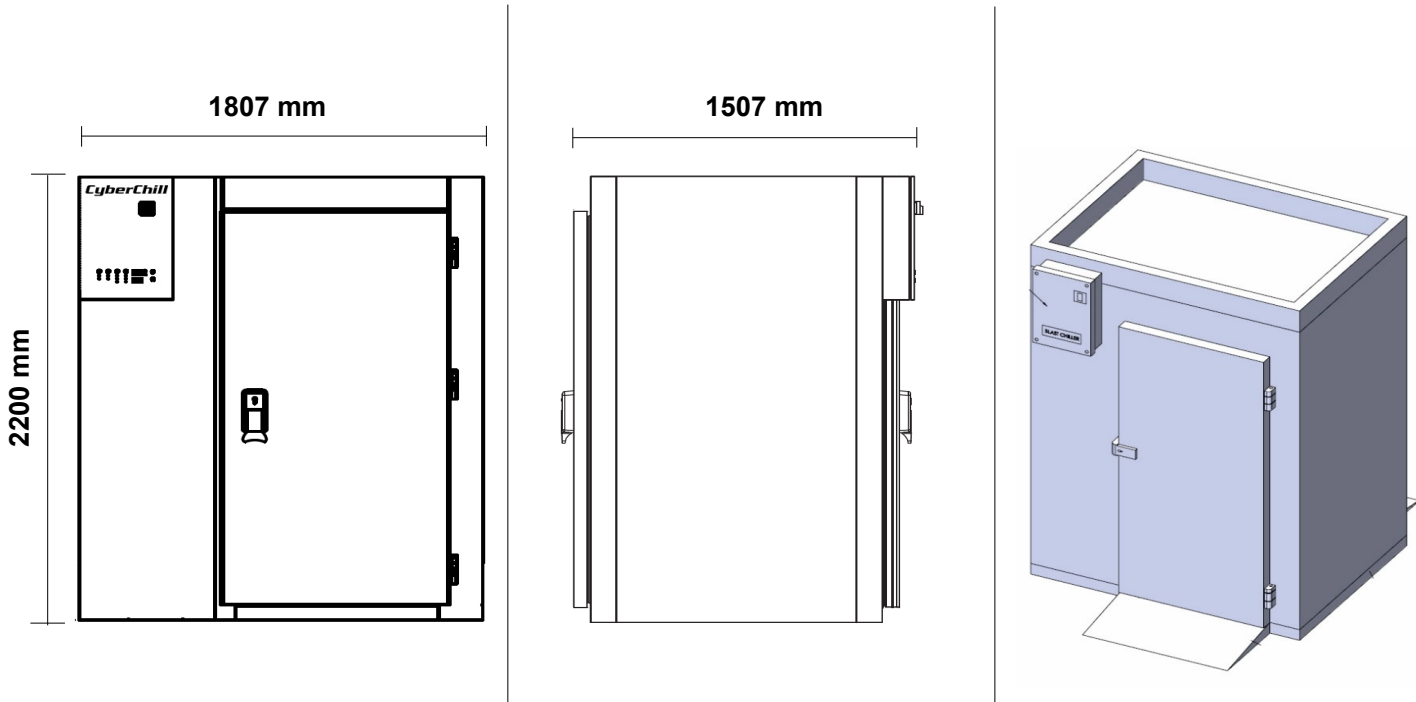

Specifications

Refrigeration system	Remote, electronically controlled, refrigeration unit		
Refrigerant	R404a	Gas Charge	n/a
Electrical	220-240 Volts a.c. 50 Hz	Amps	27.5 Amps
Nominal capacity	14050 Watts @ -5°C/-30°C SST		
Drainage	Waste heat vapouriser located in service compartment (no plumbing required)		
Insulation	60mm thick, high density Zero ODP injected polyurethane insulation		
Cabinet body	304 Stainless Steel Exterior & Interior, Galvanised Steel Back & Base		
Cabinet temperature range	+90°C to +3°C (90 mins) +90°C to -18°C (240 mins) up to 43°C ambient		
kWh/24hr	n/a	Star Rating	n/a
Cabinet capacity	130 kg	Net usable GN volume	n/a
Weight	320 kg	dB(A)	tbc
Worktop	n/a		
Door Opening	2 x SS Lockable Doors (Accept 1 x GN2/1 Trolley)		
Door Configuration	2 x Stainless Steel Solid Doors		
Shelves	Accepts 1 x GN2/1 trolley		n/a
Options	Single Door		
Cabinet dimensions	External	Internal	
Width	1807 mm	910 mm	
Depth	1507 mm	1290 mm	
Height	2200 mm (excl. legs or castors)	2040 mm	