

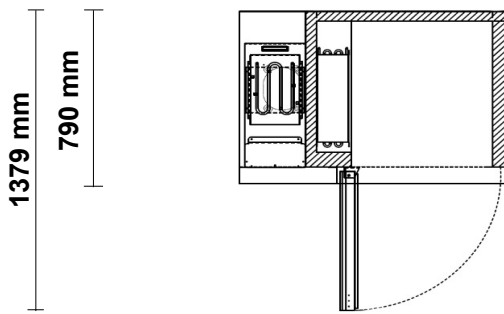


SPECIFICATIONS

RBCU164-UD



Bakery Products 1-Door Counter Chiller

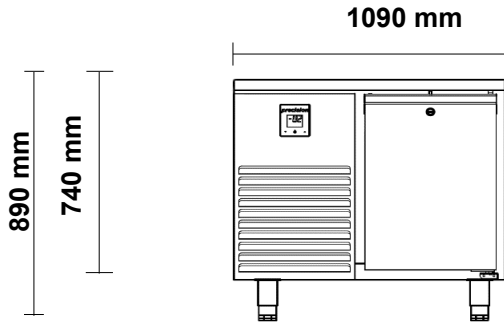

Specifications

| | | | |
|------------------------------------|---|--|----------|
| Refrigeration system | Self-contained, side mounted, electronically controlled, refrigeration unit | | |
| Refrigerant | R290 | Gas Charge | 80 g |
| Electrical | 220-240 Volts a.c. 50 Hz | Amps | tbc |
| Nominal capacity | 440 Watts @ -10°C SST | | |
| Drainage | Waste heat vaporiser located in service compartment (no plumbing required) | | |
| Insulation | 60mm thick, high density Zero ODP injected polyurethane insulation | | |
| Cabinet body | 304 Stainless Steel Interior & Exterior, Galvanised Steel Back & Base | | |
| Cabinet temperature range | -2°C to +4°C up to 43°C ambient | | |
| kWh/24hr | tbc | Star Rating | tbc |
| Cabinet internal volume | 175 litres | Net usable GN volume | tbc |
| Weight | 110 kg | dBa | 62 |
| Worktop | Removeable 40mm stainless steel worktop | | |
| Internal Door / Drawer GN Capacity | 1 x Door: Accepts full Bakery Tray (400mm wide x 600mm deep) | | |
| Doors / Drawer Configuration | 1 x SS Lockable, Self-closing solid door(s) | | |
| Tray Slides | 5 x Pairs of tray slides per door | Total = 5 | |
| Options | Stainless Steel Back and Base, Additional Slides | | |
| Cabinet dimensions | External | | Internal |
| | Width | 1090 mm | 575 mm |
| | Depth | 790 mm | 670 mm |
| | Height | 700 mm (excl. legs, castors & worktop) | 556 mm |