


SPECIFICATIONS

TBBS600-800-G



43° Topicalised 1-Door Bottle Cooler

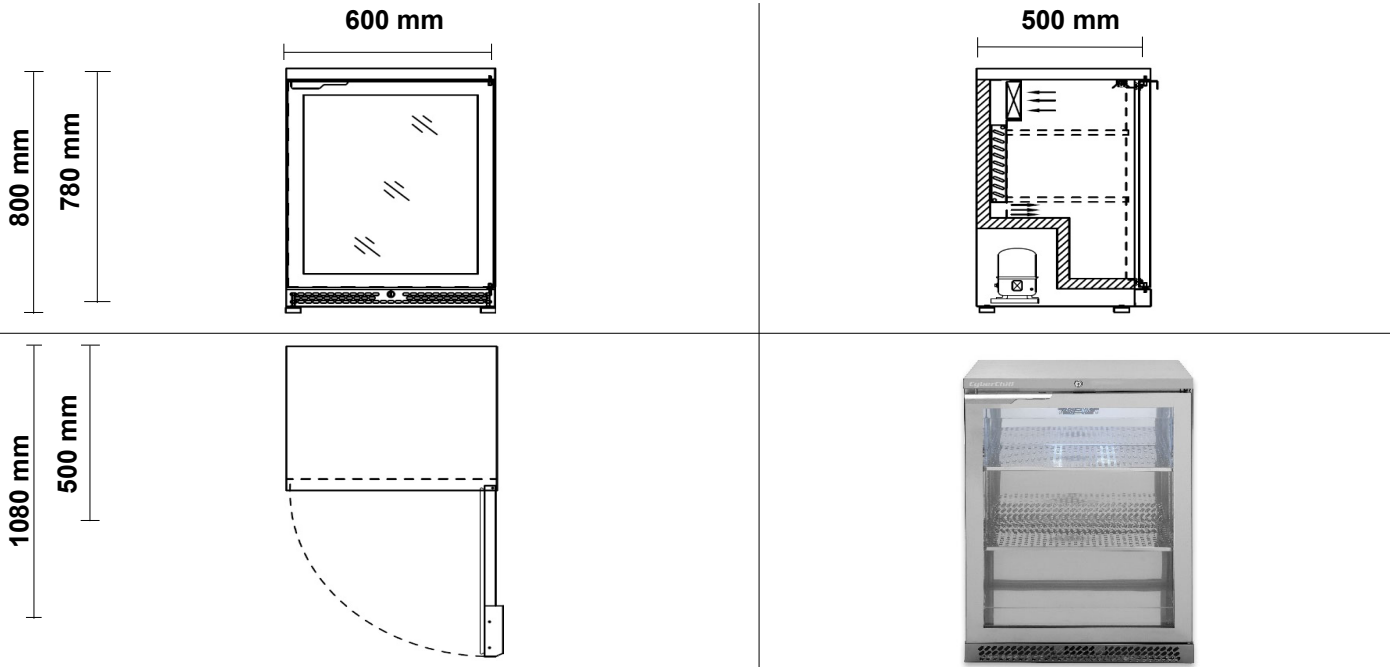

Specifications

| | | | |
|------------------------------------|--|----------------------|----------|
| Refrigeration system | Self-contained, electronically controlled, refrigeration unit | | |
| Refrigerant | R290 | Gas Charge | 80 g |
| Electrical | 220-240 Volts a.c. 50 Hz | Amps | 1.2 Amps |
| Nominal capacity | 450 Watts @ -5°C SST | | |
| Drainage | Waste heat vaporiser located in service compartment (no plumbing required) | | |
| Insulation | 35mm thick, high density Zero ODP injected polyurethane insulation | | |
| Cabinet body | 304 Stainless Steel Interior & Exterior, Galvanised Steel Back & Base | | |
| Cabinet temperature range | +3°C to +15°C up to 43°C ambient | | |
| kWh/24hr | 2.04 kWh | Star Rating | 8 Stars |
| Capacity (300ml bottles) | 126 Bottles | Net usable GN volume | tbc |
| Weight | 55 kg | dBA | tbc |
| Worktop | Integrated stainless steel worktop | | |
| Internal Door / Drawer GN Capacity | 1 x Door: 515mm wide x 351mm deep | | |
| Doors / Drawer Configuration | 1 x Lockable Triple Glazed LowE Argon filled glass door(s); | | |
| Shelves | 2 x SS Perforated adjustable shelves per door | Total = 2 | |
| Options | Solid Doors, Remote, Painted Exterior | | |
| Cabinet dimensions | External | | Internal |
| Width | 600 mm | | 530 mm |
| Depth | 500 mm | | 370 mm |
| Height | 800 mm (excl. legs, castors & worktop) | | 626 mm |

Note: Rear mounted compressor. Please ensure cabinet is removable for maintenance.