




# SPECIFICATIONS

## VSS150-B

# CyberChill

**precision**  
refrigeration

1-drawer Space Saving Solution - Variable Temp

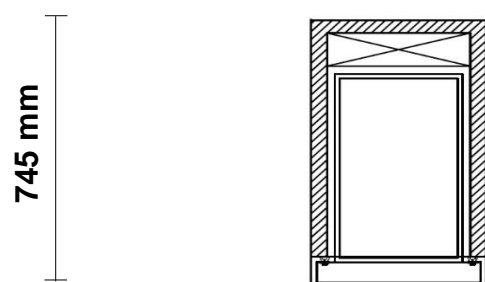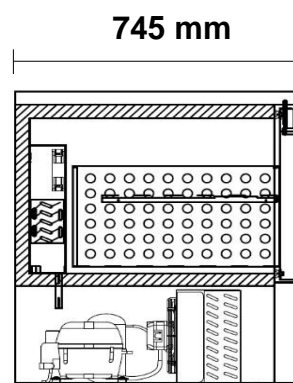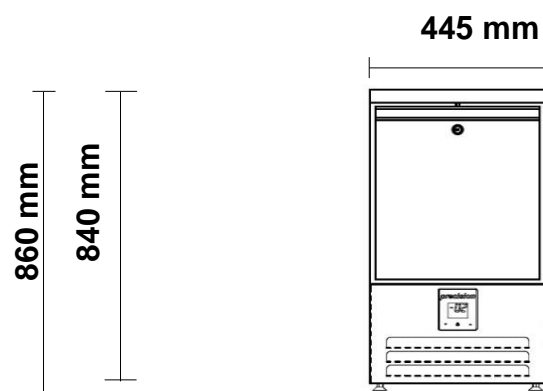

### Specifications

Refrigeration system	Self-contained, bottom mounted, electronically controlled, refrigeration unit		
Refrigerant	R290	Gas Charge	tbc
Electrical	220-240 Volts a.c. 50 Hz	Amps	1.6 Amps
Nominal capacity	405 Watts @ -10°C SST / 208W @ -30°C SST		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Insulation	50mm thick, high density Zero ODP injected polyurethane insulation		
Cabinet body	304 Stainless Steel Interior & Exterior, Galvanised Steel Back & Base		
Cabinet temperature range	+1°C to +4°C up to 43°C ambient / -18°C to -22°C up to 43°C ambient		
kWh/24hr	1.6 (C) / 3.8 (F)	Star Rating	tbc
Cabinet internal volume	80 litres	Net usable GN volume	46 litres
Weight	65 kg	dBA	58
Worktop	Removable 40mm stainless steel worktop		
Internal Door / Drawer GN Capacity	1 x Barista Drawer		
Doors / Drawer Configuration	1 x SS Lockable Barista Drawer		
Shelves	2 x PVC-coated wire shelves & adjustable tray slides per door	Total = 0	
Options	Castors or Legs, Bank of Half Drawers		
Cabinet dimensions	External	Internal	
Width	445 mm	365 mm	
Depth	745 mm	630 mm	
Height	800 mm (excl. legs, castors & worktop)	445 mm	