



SPECIFICATIONS

WS1400-1950

CyberChill

precision
refrigeration

2-dr Upright Wine Cabinet - Heavy Duty

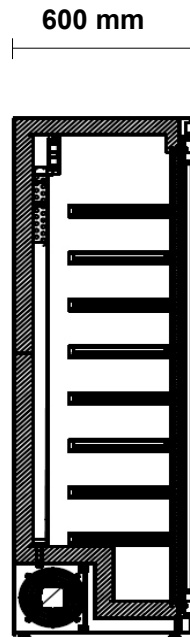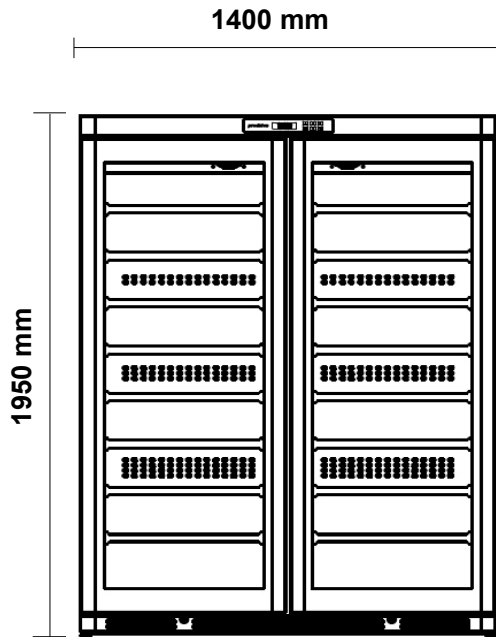

Specifications

Refrigeration system	Self-contained, electronically controlled, refrigeration unit		
Refrigerant	R290	Gas Charge	90 g
Electrical	220-240 Volts a.c. 50 Hz	Amps	2.3 Amps
Nominal capacity	440 Watts @ -5°C SST		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Insulation	60mm thick, high density Zero ODP injected polyurethane insulation		
Cabinet body	304 Stainless Steel Exterior & Interior, Galvanised Steel Back & Base		
Cabinet temperature range	+3°C to +15°C up to 32°C ambient		
kWh/24hr	n/a	Star Rating	n/a
Humidity	60-85%	Cabinet Capacity	176 wine bottles
Weight	200 kg	dB(A)	58
Worktop	n/a		
Door Opening	2 x SS Self-Closing Lockable Doors		
Door Configuration	2 x Triple Glazed LowE Argon filled Glass Doors;		
Shelves	8 x Wooden Pull Out Drawers	Total = 8	
Options	Solid Door		
Cabinet dimensions		External	Internal
	Width	1400 mm	1262 mm
	Depth	600 mm	439 mm
	Height	1950 mm (excl. legs or castors)	1752 mm