

SPECIFICATIONS WS700-1950



1-dr Upright Wine Cabinet - Heavy Duty



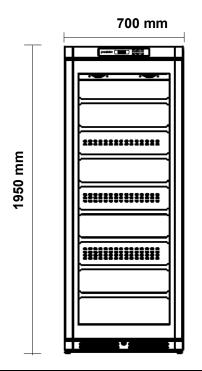

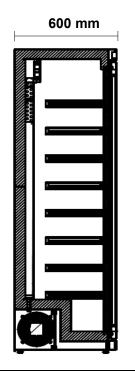

| Specifications | | | |
|---------------------------|--|------------------|-----------------|
| Refrigeration system | Self-contained, electronically controlled, refrigeration unit | | |
| Refrigerant | R290 | Gas Charge | 80 g |
| Electrical | 220-240 Volts a.c. 50 Hz | Amps | 1.5 Amps |
| Nominal capacity | 356 Watts @ -5°C SST | | |
| Drainage | Waste heat vaporiser located in service compartment (no plumbing required) | | |
| Insulation | 60mm thick, high density Zero ODP injected polyurethane insulation | | |
| Cabinet body | 304 Stainless Steel Exterior & Interior, Galvanised Steel Back & Base | | |
| Cabinet temperature range | +3°C to +15°C up to 32°C ambient | | |
| kWh/24hr | n/a | Star Rating | n/a |
| Humidity | 60-85% | Cabinet Capacity | 88 wine bottles |
| Weight | 133 kg | dBA | 58 |
| Worktop | n/a | | |
| Door Opening | 1 x SS Self-Closing Lockable Doors | | |
| Door Configuration | 1 x Triple Glazed LowE Argon filled Glass Doors; | | |
| Shelves | 8 x Wooden Pull Out Drawers | | Total = 4 |
| Options | Solid Door | | |
| Cabinet dimensions | External | Internal | |
| Width | 700 mm | 562 mm | |
| Depth | 600 mm | 439 mm | |
| Height | 1950 mm (excl. legs or castors) | 1752 mm | |