


# SPECIFICATIONS

## DDPT1401-DD

**CyberChill**

**precision**  
refrigeration

### 2-dr Top Mount Duck Drying Cabinet

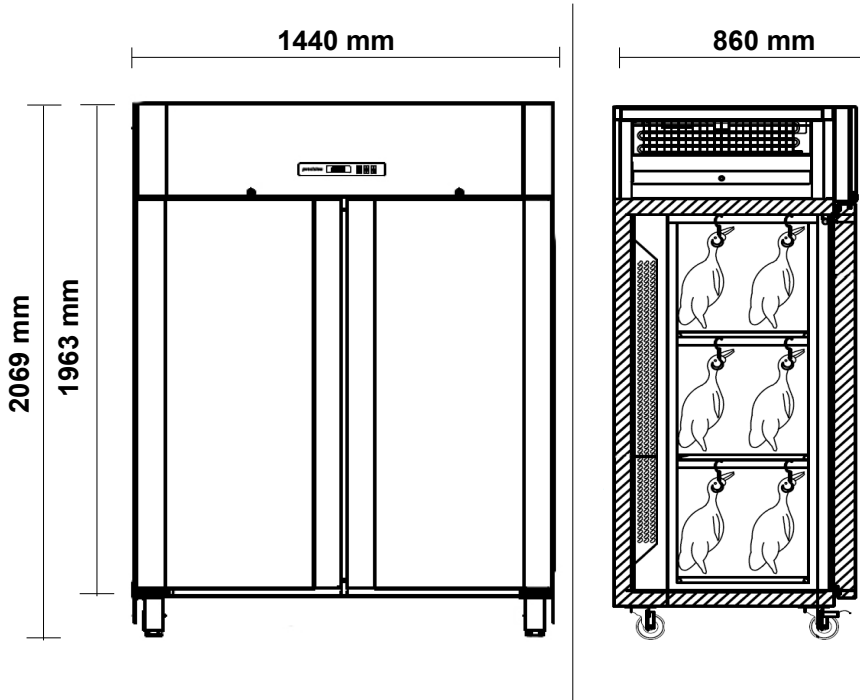

### Specifications

Refrigeration system	Self-contained, top mounted, electronically controlled, refrigeration unit		
Refrigerant	R290	Gas Charge	135 g
Electrical	220-240 Volts a.c. 50 Hz	Amps	4.6 Amps
Nominal capacity	964 Watts @ -10°C SST		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Insulation	90mm thick, high density Zero ODP injected polyurethane insulation		
Cabinet body	304 Stainless Steel Exterior & Interior, Galvanised Steel Back & Base		
Cabinet temperature range	+1°C to +20°C up to 43°C ambient		
kWh/24hr	n/a	Star Rating	n/a
Humidity	45-60%	Cabinet Capacity	1400 litres
Weight	210 kg	dBa	n/a
Worktop	n/a		
Door Opening	2 x SS Self-Closing Lockable Doors (Accepts full GN1/1 & GN1/2 pans)		
Door Configuration	2 x Stainless Steel Solid Doors		
Shelves	3 x Meat Hanging Rails (with drip trays)		Total = 6
Options	Glass Doors		
Cabinet dimensions	External		Internal
	Width	1440 mm	1277 mm
	Depth	860 mm	657 mm
	Height	1963 mm (excl. legs or castors)	1459 mm