


# SPECIFICATIONS

## LPU401-FDR

### 1-dr Upright Bottom Mount Freezer

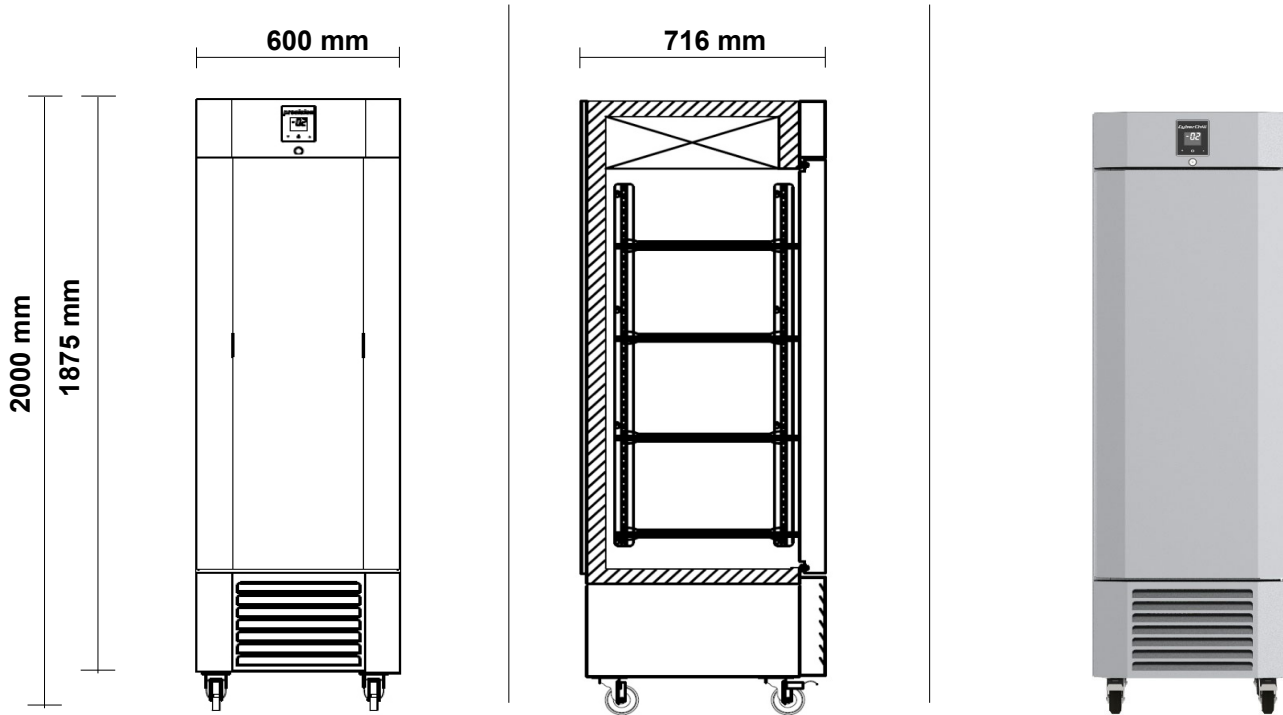

### Specifications

Refrigeration system	Self-contained, bottom mounted, electronically controlled, refrigeration unit		
Refrigerant	R290	Gas Charge	120 g
Electrical	220-240 Volts a.c. 50 Hz	Amps	4.2 Amps
Nominal capacity	449 Watts @ -30°C SST		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Insulation	90mm thick, high density Zero ODP injected polyurethane insulation		
Cabinet body	304 Stainless Steel Exterior & Interior, Galvanised Steel Back & Base		
Cabinet temperature range	-18°C to -22°C up to 43°C ambient		
kWh/24hr	tbc	Star Rating	tbc
Cabinet internal volume	400 litres	Net usable GN volume	tbc
Weight	120 kg	dB(A)	69
Worktop	n/a		
Door Opening	1 x Self-Closing Lockable Doors (Accepts full GN1/1 & GN1/2 pans)		
Door Configuration	1 x Stainless Steel Solid Doors		
Shelves	4 x shelves & adjustable tray slides per door	Total = 4	
Options	Glass Door, Half Doors, Castors/Legs		
Cabinet dimensions	External		Internal
	Width	600 mm	490 mm
	Depth	716 mm	540 mm
	Height	1875 mm (excl. legs or castors)	1294 mm