


# SPECIFICATIONS

## CCB1400-WHT/WHT-GGG



### 3-dr Bottom Mount Merchandiser

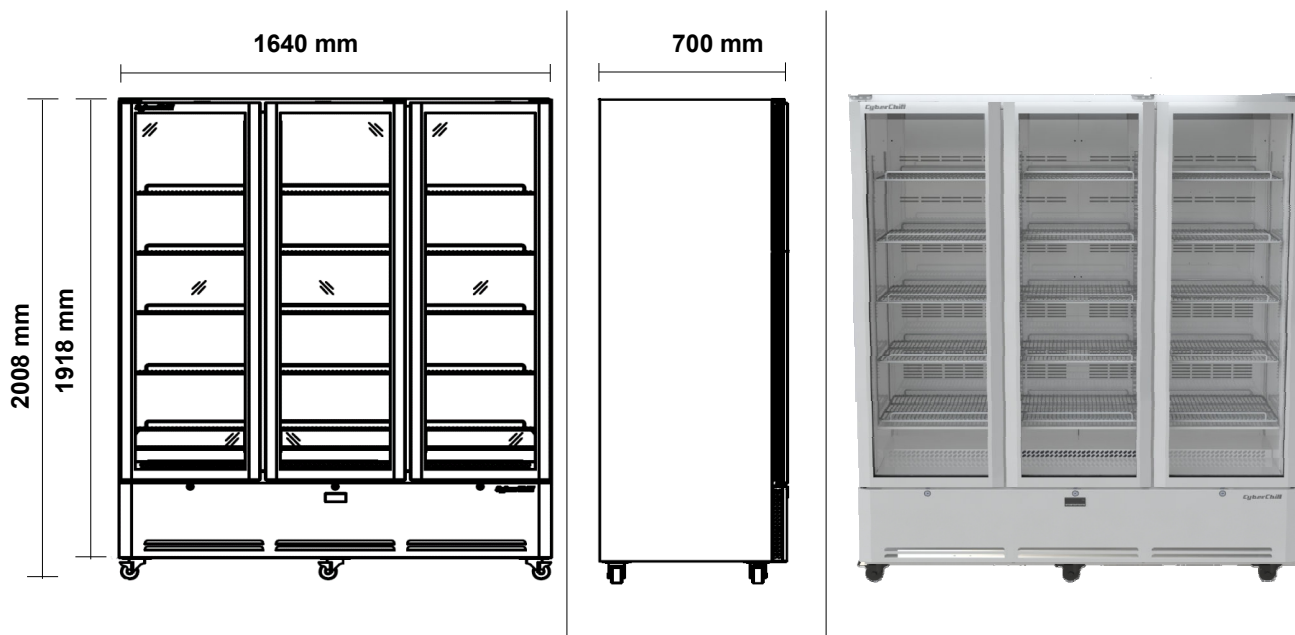

### Specifications

|                           |  |                      |            |
|---------------------------|--|----------------------|------------|
| Refrigeration system      | Self-contained, bottom mounted, electronically controlled, refrigeration unit  |                      |            |
| Refrigerant               | R290   | Gas Charge           | 143 g      |
| Electrical                | 220-240 Volts a.c. 50 Hz   | Amps                 | tbc        |
| Nominal capacity          | 752 Watts @ -5°C SST   |                      |            |
| Drainage                  | Waste heat vaporiser located in service compartment (no plumbing required)     |                      |            |
| Insulation                | 50mm thick, high density CFC, HCFC & HFC free Zero ODP injected PUR insulation |                      |            |
| Cabinet body              | White Powder Coated Steel Exterior & Interior, Galvanised Steel Back & Base    |                      |            |
| Cabinet temperature range | +1°C to +4°C up to 40°C ambient  |                      |            |
| kWh/24hr                  | 5.48 kWh   | Star Rating          | 7 Stars    |
| Cabinet internal volume   | 1400 litres  | Net usable GN volume | tbc        |
| Weight                    | 315 kg   | dBa                  | tbc        |
| Lightbox                  | n/a  |                      |            |
| Door Opening              | 3 x Self-Closing Lockable Door(s)  |                      |            |
| Door Configuration        | 3 x Double Glazed LowE Argon filled Glass Doors;                               |                      |            |
| Shelves                   | 5 x shelves & shelf clips per door   |                      | Total = 15 |
| Options                   | Solid/Glass Doors, Legs/Castors, Black/White/SS Exterior, etc.                 |                      |            |
| Cabinet dimensions        | External   | Internal             |            |
| Width                     | 1640 mm  | 1540 mm              |            |
| Depth                     | 700 mm   | 610 mm               |            |
| Height                    | 1918 mm (excl. legs or castors)  | 1445 mm              |            |