


SPECIFICATIONS

CCB300-WHT/WHT-GR



1-dr Bottom Mount Merchandiser

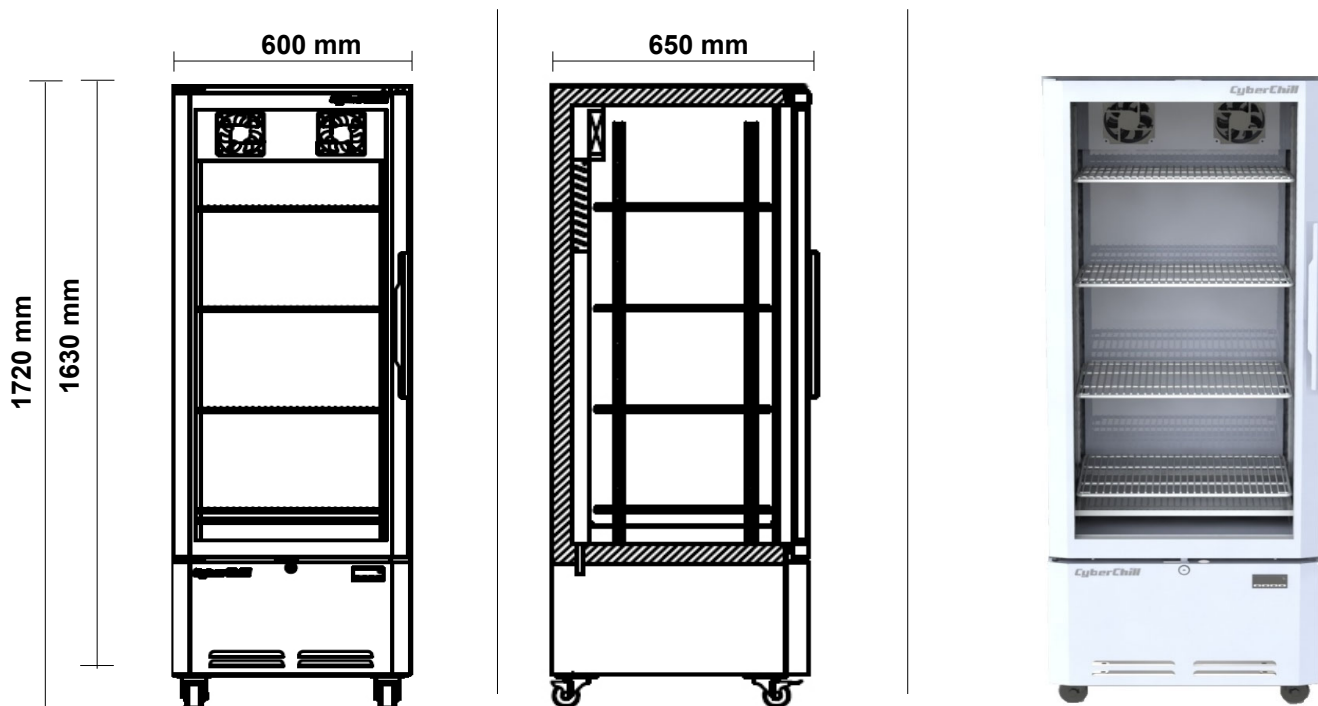

Specifications

Refrigeration system	Self-contained, bottom mounted, electronically controlled, refrigeration unit		
Refrigerant	R290	Gas Charge	105 g
Electrical	220-240 Volts a.c. 50 Hz	Amps	tbc
Nominal capacity	500 Watts @ -5°C SST		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Insulation	50mm thick, high density CFC, HCFC & HFC free Zero ODP injected PUR insulation		
Cabinet body	White Powder Coated Steel Exterior & Interior, Galvanised Steel Back & Base		
Cabinet temperature range	+1°C to +4°C up to 40°C ambient		
kWh/24hr	1.77 kWh	Star Rating	9 Stars
Cabinet internal volume	300 litres	Net usable GN volume	tbc
Weight	110 kg	dBA	tbc
Lightbox	n/a		
Door Opening	1 x Self-Closing Lockable Door(s)		
Door Configuration	1 x Double Glazed LowE Argon filled Glass Doors;		
Shelves	4 x shelves & shelf clips per door	Total = 4	
Options	Solid/Glass Doors, Legs/Castors, Black/White/SS Exterior, etc.		
Cabinet dimensions	External	Internal	
Width	600 mm	500 mm	
Depth	650 mm	560 mm	
Height	1630 mm (excl. legs or castors)	1157 mm	