




SPECIFICATIONS

MCU123-UD

CyberChill

precision
refrigeration

520 Series 1-Door Integral Counter Chiller

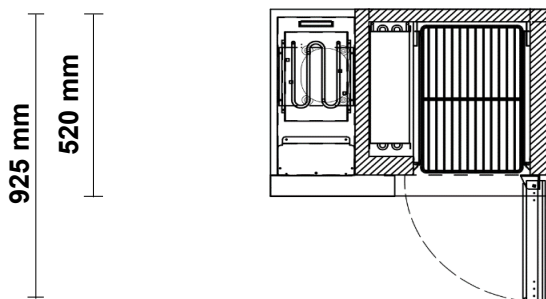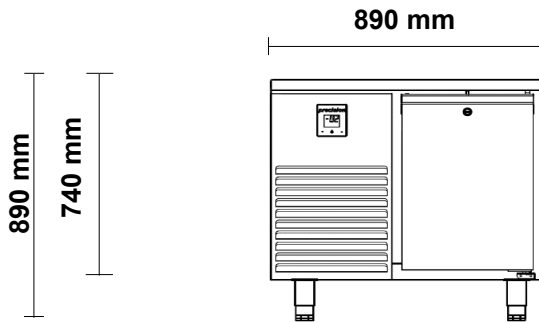

Specifications

Refrigeration system	Self-contained, side mounted, electronically controlled, refrigeration unit		
Refrigerant	R290	Gas Charge	86 g
Electrical	220-240 Volts a.c. 50 Hz	Amps	1.6 Amps
Nominal capacity	383 Watts @ -10°C SST		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Insulation	60mm thick, high density Zero ODP injected polyurethane insulation		
Cabinet body	304 Stainless Steel Interior & Exterior, Galvanised Steel Back & Base		
Cabinet temperature range	-2°C to +4°C up to 43°C ambient		
kWh/24hr	tbc	Star Rating	tbc
Cabinet internal volume	60 litres	Net usable GN volume	tbc
Weight	92 kg	dBA	62
Worktop	Removable 40mm stainless steel worktop		
Internal Door / Drawer GN Capacity	1 x Door: Accepts full GN2/3 pans		
Doors / Drawer Configuration	1 x SS Lockable, Self-closing SS solid doors		
Shelves	2 x PVC-coated wire shelves & adjustable tray slides per door		Total = 2
Options	Glass Doors, Castors, SS Shelves, LED light, Half or Triple Drawers, etc.		
Cabinet dimensions	External		Internal
	Width	890 mm	380 mm
	Depth	520 mm	400 mm
	Height	700 mm (excl. legs, castors & worktop)	600 mm