
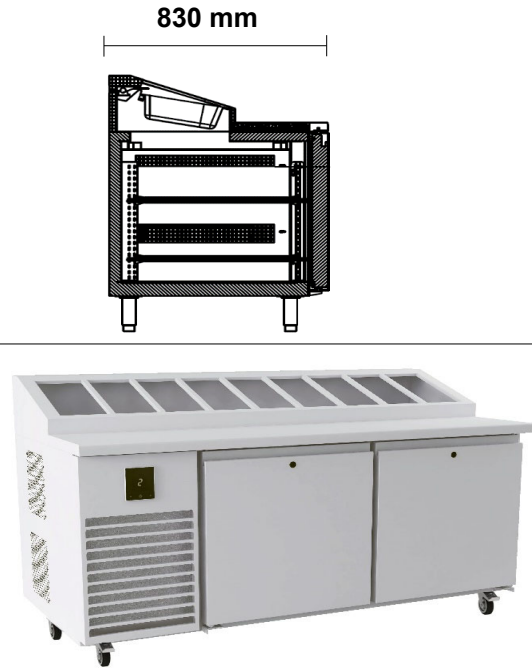


# SPECIFICATIONS

## MCU221-UDD-PC

### 2-dr Counter Chiller 830-Series (Pizza)

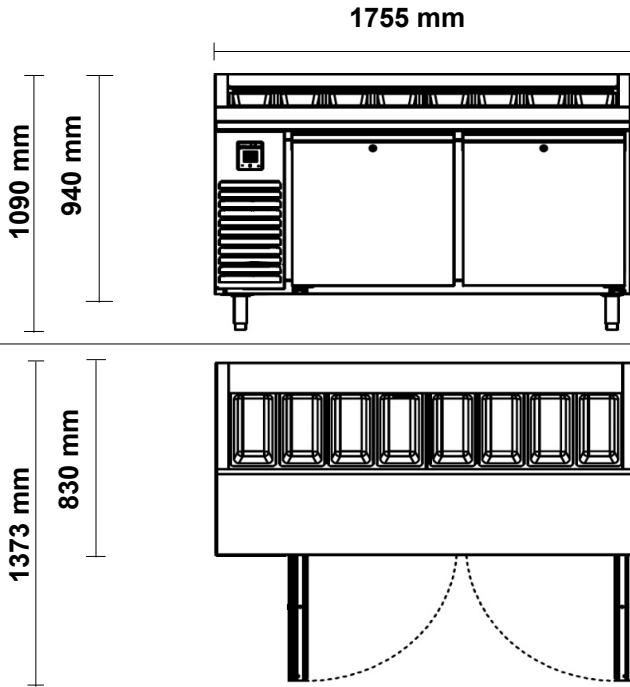

### Specifications

Refrigeration system	Self-contained, side mounted, electronically controlled, refrigeration unit		
Refrigerant	R290	Gas Charge	80 g
Electrical	220-240 Volts a.c. 50 Hz	Amps	tbc
Nominal capacity	370 Watts @ -10°C SST		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Insulation	60mm thick, high density Zero ODP injected polyurethane insulation		
Cabinet body	304 Stainless Steel Interior & Exterior, Galvanised Steel Back & Base		
Cabinet temperature range	+1°C to +4°C up to 32°C ambient		
kWh/24hr	3.2 kWh	Star Rating	tbc
Cabinet internal volume	600 litres	Net usable GN volume	tbc
Weight	140 kg	dBA	62
Worktop	Raised Pan Grid to suit 9 x GN1/3 pans (100mm deep) (pans not included)		
Internal Door / Drawer GN Capacity	2 x Door: Accepts full GN2/1 pans (650mm wide x 530mm deep)		
Doors / Drawer Configuration	3 x SS Lockable, Self-closing solid door(s)		
Shelves	2 x PVC-coated wire shelves & adjustable tray slides per door	Total = 4	
Options	Triple/Half Drawers, Remote Refrigeration		
Cabinet dimensions	External	Internal	
Width	1755 mm	1235 mm	
Depth	830 mm	670 mm	
Height	740 mm (excl. legs, castors & worktop)	556 mm	