
SPECIFICATIONS CyberChill BBS320-SS/MIR-UGGG-RU

Retro Back Bar Heavy Duty 3-Door Chiller

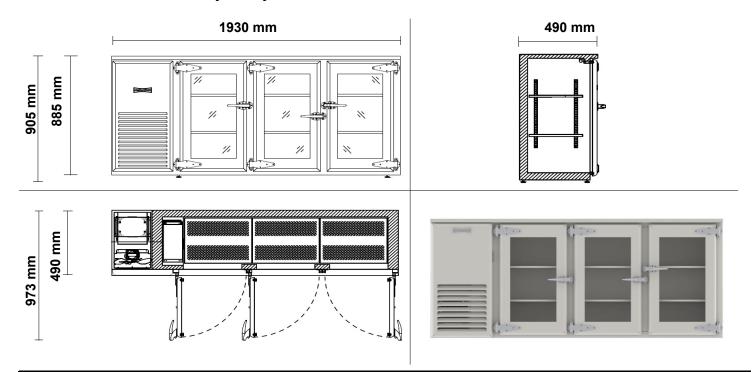

| Specifications | | | |
|------------------------------|--|----------------------|-----------|
| Refrigeration system | Self-contained, side mounted, electronically controlled, refrigeration unit | | |
| Refrigerant | R290 | Gas Charge | 80 g |
| Electrical | 220-240 Volts a.c. 50 Hz | Amps | 1.4 Amps |
| Nominal capacity | 373 Watts @ -5°C SST | | |
| Drainage | Waste heat vaporiser located in service compartment (no plumbing required) | | |
| Insulation | 50mm thick, high density Zero ODP injected polyurethane insulation | | |
| Cabinet body | 304 Stainless Steel Exterior & Mirror Interior, Galvanised Steel Back & Base | | |
| Cabinet temperature range | +3°C to +15°C up to 43°C ambient | | |
| kWh/24hr | n/a | Star Rating | tbc |
| Cabinet internal volume | 270 litres | Net usable GN volume | tbc |
| Weight | 160 kg | dBA | 62 |
| Worktop | Integrated 27mm stainless steel worktop | | |
| Door / Drawer | 3 x SS Self-Closing Lockable Doors | | |
| Doors / Drawer Configuration | 3 x Triple Glazed LowE Argon filled Glass Doors; | | |
| Shelves | 2 x SS Perforated shelves & adjustable tray slides per door Total = 6 | | Total = 6 |
| Options | Clear or Ribbed Glass Doors, Solid Doors, Painted Exterior, etc. | | |
| Cabinet dimensions | External | Internal | |
| Width | 1930 mm | tbc | |
| Depth | 490 mm | tbc | |
| Height | 885 mm (excl. legs, castors & worktop) | tbc | |