
## SPECIFICATIONS HWU111-SS/SS-UG



## 1-Door Integral Wall Cabinet Chiller

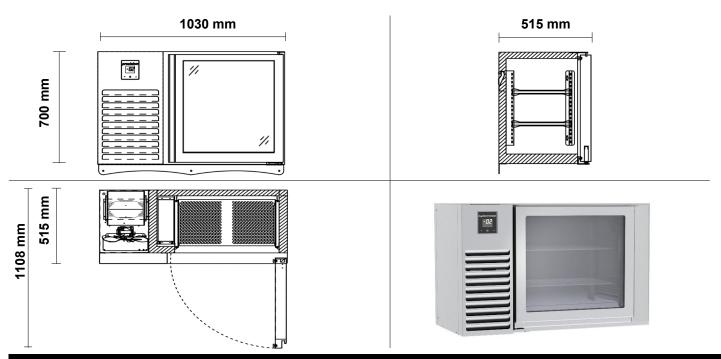

	Specifications			
Refrigeration system	Self-contained, side mounted, electronically controlled, refrigeration unit			
Refrigerant	R290	Gas Charge	90 g	
Electrical	220-240 Volts a.c. 50 Hz	Amps	tbc	
Nominal capacity	450 Watts @ -5°C SST			
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)			
Insulation	60mm thick, high density Zero ODP injected polyurethane insulation			
Cabinet body	304 Stainless Steel Exterior & Mirror Interior, Galvanised Steel Back & Base			
Cabinet temperature range	+1°C to +4°C up to 43°C ambient			
kWh/24hr	tbc	Star Rating	tbc	
Cabinet internal volume	67 litres	Net usable GN volume	tbc	
Weight	80 kg	dBA	55	
Worktop	n/a			
Door / Drawer	1 x SS Self-Closing Doors			
Doors / Drawer Configuration	1 x Triple Glazed LowE Argon filled Glass D	oors;		
Shelves	2 x SS Perforated shelves & adjustable tray slides per door Total = 2		Total = 2	
Options	Solid doors, Black Stainless Steel Exterior, Floor Mount Model, Lockable Doors			
Cabinet dimensions	External	Internal		
Width	1030 mm	573 m	m	
Depth	515 mm	400 mm		
Height	700 mm (excl. legs, castors & worktop)	600 m	600 mm	

Note: A wall mounting kit is included with this cabinet