


SPECIFICATIONS

RBPT1401-DD



2-dr Upright Top Mount Bakery Chiller

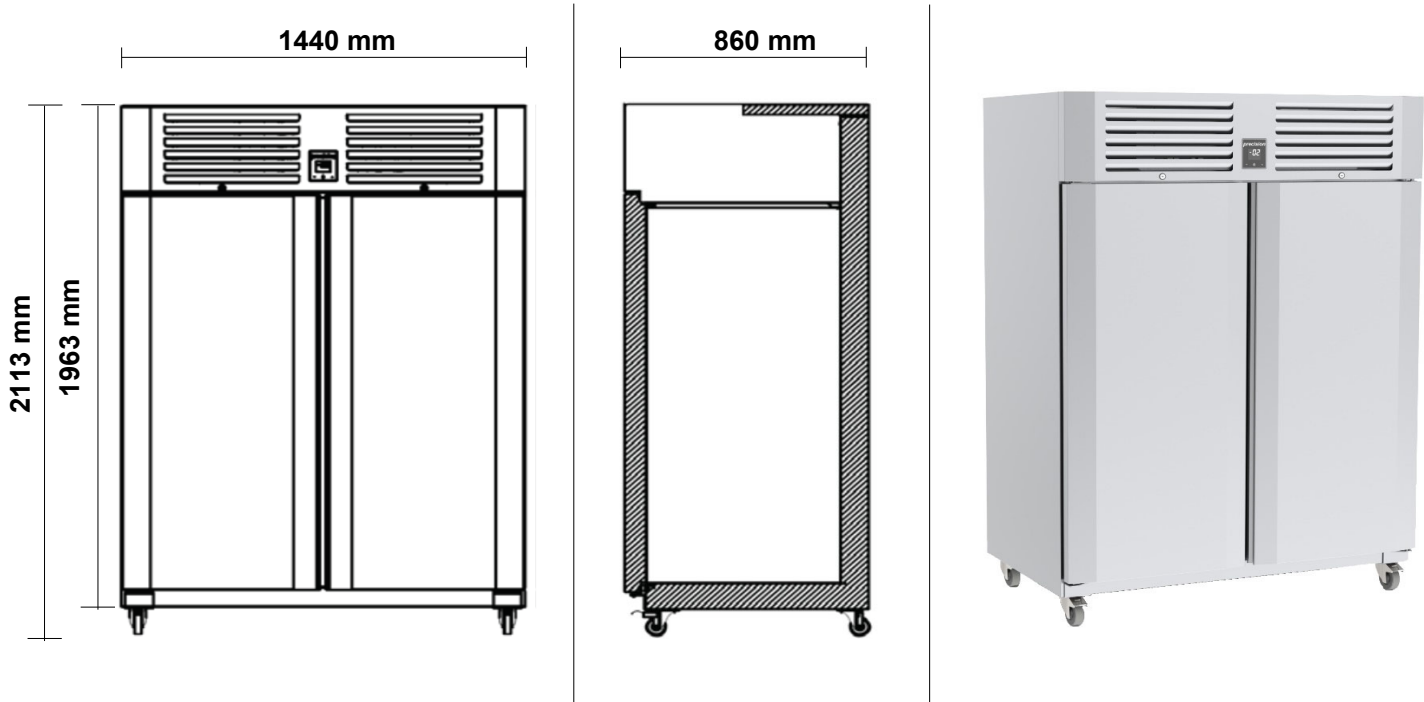

Specifications

Refrigeration system	Self-contained, top mounted, electronically controlled, refrigeration unit		
Refrigerant	R290	Gas Charge	150 g
Electrical	220-240 Volts a.c. 50 Hz	Amps	tbc
Nominal capacity	964 Watts @ -10°C SST		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Insulation	90mm thick, high density Zero ODP injected polyurethane insulation		
Cabinet body	304 Stainless Steel Exterior & Interior, Galvanised Steel Back & Base		
Cabinet temperature range	-2°C to +4°C up to 43°C ambient		
kWh/24hr	tbc	Star Rating	tbc
Cabinet internal volume	1400 litres	Net usable GN volume	tbc
Weight	210 kg	dB(A)	66
Worktop	n/a		
Door Opening	2 x Door: Accepts full Bakery Tray (400mm wide x 600mm deep)		
Door Configuration	2 x SS Lockable, Self-closing solid door(s)		
Tray Slides	Accepts 10 x Bakery Trays (not included) per door (150mm deep)	Total = 20	
Options	Glass Door, Remote, Legs/Castors		
Cabinet dimensions	External		Internal
	Width	1440 mm	1277 mm
	Depth	860 mm	657 mm
	Height	1963 mm (excl. legs or castors)	1459 mm